



2022 —

PRODUCT CATALOG

• Profile • Certificates • PRODUCT

Cosunled CO.LTD

PRODUCT CATALOG

Tell: 0755-2998583
Fax: 0755-0755-278999
Email: info@cosunled.com
www.cosunled.com
Address: Room, 208, Building A, Tangwei Community Industrial Avenue, Fuyong Street, Baoan District, Shenzhen, Guangdong, China

ABOUT US

COMPANY PROFILE

COSUN was founded in 2008, A state-level high-tech enterprise and ISO9001 certified factory which covers 11,000 square meters with 4 building levels. We are focusing on energy saving and environmental protection green lighting industry, specialized in energy-saving investment business, Indoor, Industrial, Outdoor Area lighting, landscape lighting, engineering, designing, construction and installation. Our products include LED T8 tube light, LED panel light, LED troffer light, LED UFO light, LED high bay light, LED linear high bay light, LED Area light etc. We have build an Advanced Hi-Tech Laboratory, manufacturing and automatic assembly zone completely based on international standards, equipped with all kind of industry leading manufacturing machines and test equipment. We own all kind of advanced LED Lamp manufacturing machines including Auto SMT machines, Solder paste machine, reflow soldering machine along with all kinds of LAB testing device and equipment, such as Integrated sphere, IES tester, aging tester, intelligent surge generator, surge protector etc. At COSUN we understand the importance of quality. All our products are tested to perfection and are designed as per international standards and norms. All our products series are capable to work continuously in extreme outdoor and indoor conditions. In addition, each product is covered by an industry leading warranty for our members to demonstrate our commitment to quality. Our product series follows and certified with DLC5.1, UL & ETL standards. All Product series comes with an optional warranty of 5 & 10 years. COSUN mission is to create an art of perfect light and color in order to provide the LED luminaires a Hi-tech end, high efficiency, significant energy saving aptitude, true elegancy, long unquestionable lifetime, economical, ecologically pure and must be profitable for the end user and collaborator. COSUN has been acknowledged as one of the most reliable supplier in North America market with an annual turnover reaching up to US\$ 100,000. COSUN, the partner you can count on when thinking about LED Indoor, Industrial & Outdoor Areas lighting.





PRODUCTION EQUIPMENT



R&D EQUIPMENT



Product Certificates



CONTENTS

LED T8 Tube Light(Type A+B)

Page 7-8



LED T8 Tube Light(Type B)

Page 9-10




LED Back-Lit Panel Light (Power & CCT Tunable)

Page 11-12



LED Panel Light

Page 13-14



LED UFO High Bay Light

Page 15-18



LED Linear High Bay Light

Page 19-20



LED Shoebox /Area Light

Page 21-22



LED Troffer Light

Page 23-24



LED Strip Light

Page 27-28




LED T8 Tube Light
(Type A+B)



PRODUCT FEATURES

- ✓ ETC/CETL/DLC listed.
- ✓ Optional Power(W): 2ft-10W, 4ft-12W/15W/18W/22W.
- ✓ Optional Lumen Efficacy(Lm/W): 110Lm/W,130Lm/W and 150L/W.
- ✓ Input Voltage(V): 100-277V AC without ballast/100-347V AC with ballast.
- ✓ Work with or without ballast.
- ✓ Mainly compatible with Instant star ballasts also can work with some rapid start ballasts & programmed start ballasts.
- ✓ Aluminum housing for excellent heat dissipation.
- ✓ Bypass ballast,Double ended or single ended power optional.
- ✓ Clear or frosted PC cover (optional).
- ✓ 5 year's warranty.

PRODUCT DIMENSION

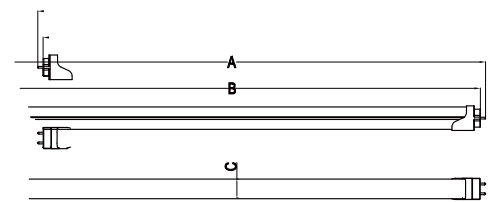

Size	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)	D (inch)(mm)
2FT	27.30" (602mm)	23.15" (588mm)	ø 0.98" (24.98mm)	0.5" (12.7mm)
4FT	47.72" (1212mm)	47.17" (1198mm)	ø 0.98" (24.98mm)	0.5" (12.7mm)

SPECIFICATION




High Lumen Efficacy

Model	Size	Power	Input Voltage	Input Current	PF	Lumen Efficacy	Ra	CCT
CS-T82FT10W-AB	2FT	10W	AC100-277V	0.10A	>0.9	130Lm/W	80	3000K-5000K
CS-T84FT12W-AB	4FT	12W	AC100-277V	0.12A	>0.9	150Lm/W	80	3000K-5000K
CS-T84FT15W-AB	4FT	15W	AC100-277V	0.15A	>0.9	130Lm/W	80	3000K-5000K
CS-T84FT18W-AB	4FT	18W	AC100-277V	0.18A	>0.9	130Lm/W	80	3000K-5000K
CS-T84FT22W-AB	4FT	22W	AC100-277V	0.22A	>0.9	130Lm/W	80	3000K-5000K

Low Lumen Efficacy

Model	Size	Power	Input Voltage	Input Current	PF	Lumen Efficacy	Ra	CCT
CS-T82FT10W-AB	2FT	10W	AC100-277V	0.10A	>0.9	110Lm/W	80	3000K-5000K
CS-T84FT15W-AB	4FT	15W	AC100-277V	0.15A	>0.9	110Lm/W	80	3000K-5000K
CS-T84FT18W-AB	4FT	18W	AC100-277V	0.18A	>0.9	110Lm/W	80	3000K-5000K
CS-T84FT22W-AB	4FT	22W	AC100-277V	0.22A	>0.9	110Lm/W	80	3000K-5000K

TEST REPORT

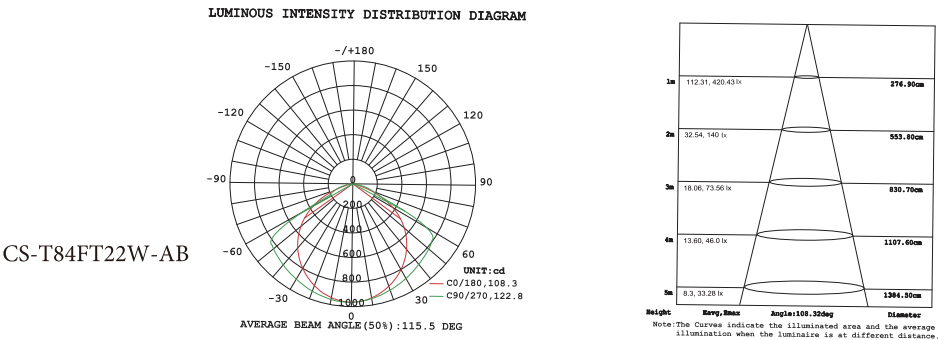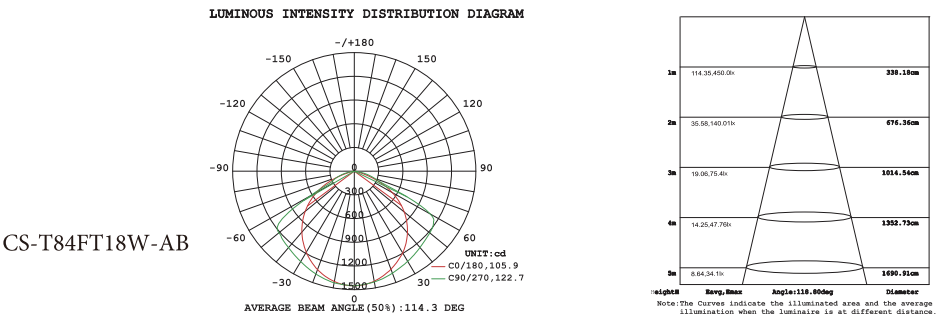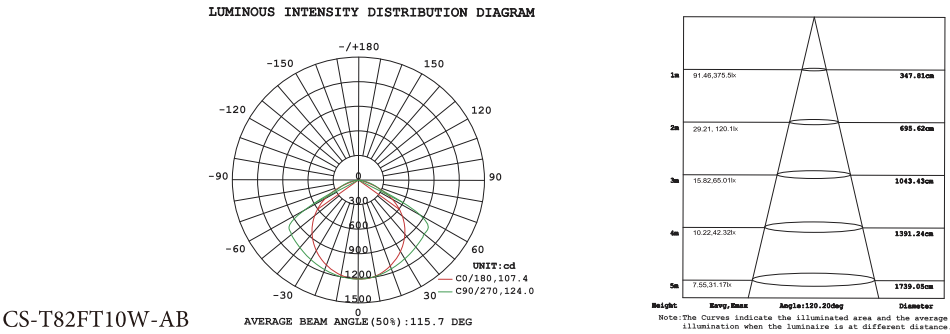


LED T8 Tube Light
(Type B)



PRODUCT FEATURES

- ✓ ETL,cETL & DLC Listed.
- ✓ Optional Power(W): 2ft-12W/15/W/18W, 4ft-40W.
- ✓ Optional Lumen Efficacy(Lm/W): 120Lm/W,130Lm/W and 150L/W.
- ✓ Input Voltage(V):100-277V AC without ballast/100-347V AC with ballast.
- ✓ Work with or without ballast.
- ✓ Mainly compatible with Instant star ballasts also can work with some rapid start ballasts & programmed start ballasts.
- ✓ Aluminum housing for excellent heat dissipation.
- ✓ Bypass ballast, double ended or single ended power optional.
- ✓ Clear or frosted PC cover (optional).
- ✓ 5 year's warranty.

PRODUCT DIMENSION

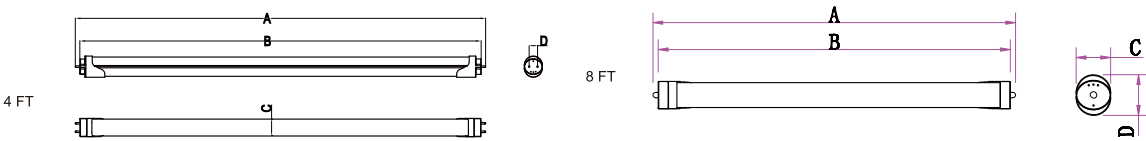

size	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)	D (inch)(mm)
4 FT	47.72" (1212mm)	47.17" (1198mm)	ø 0.98" (24.8mm)	0.5" (12.7mm)
8 FT	93.74" (2381mm)	93.19" (2367mm)	1.14" (29.0mm)	1.3" (33.0mm)



SPECIFICATION

Model	Size	Power	Input Voltage	Input Current	PF	Lumen Efficacy	Ra	CCT
CS-T84FT12W-B	4FT	12W	AC100-277V	0.12A	>0.9	150Lm/W	80	3000K-5000K
CS-T84FT15W-B	4FT	15W	AC100-277V	0.15A	>0.9	120Lm/W	80	3000K-5000K
CS-T84FT18W-B	4FT	18W	AC100-277V	0.18A	>0.9	120Lm/W	80	3000K-5000K
CS-T84FT40W-B	8FT	40W	AC100-277V	0.40A	>0.9	130Lm/W	80	3000K-5000K

TEST REPORT



CS-T84FT12W-B

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

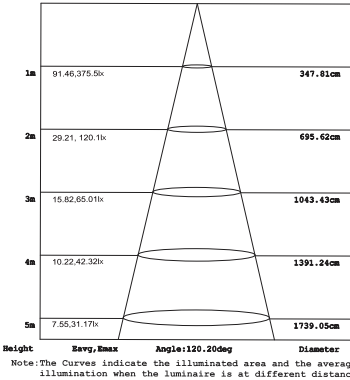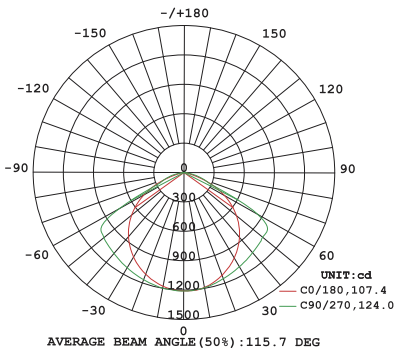



CS-T84FT15W-B

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

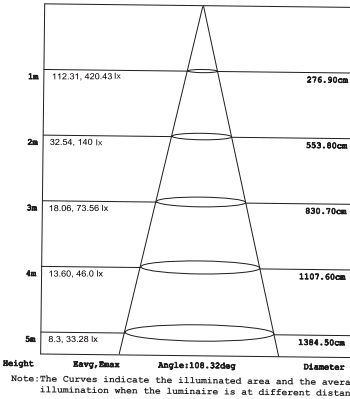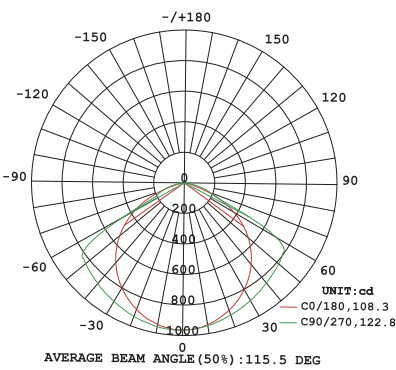


CS-T84FT18W-B

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

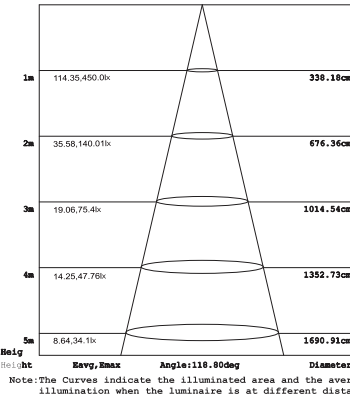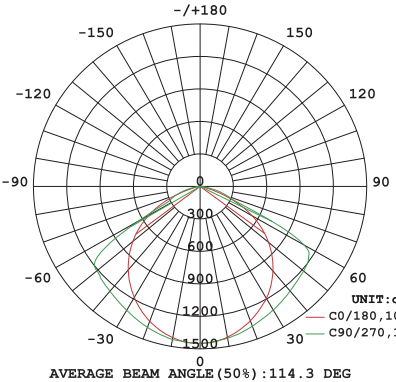


LED Back-Lit Panel Light
(Power & CCT Tunable)

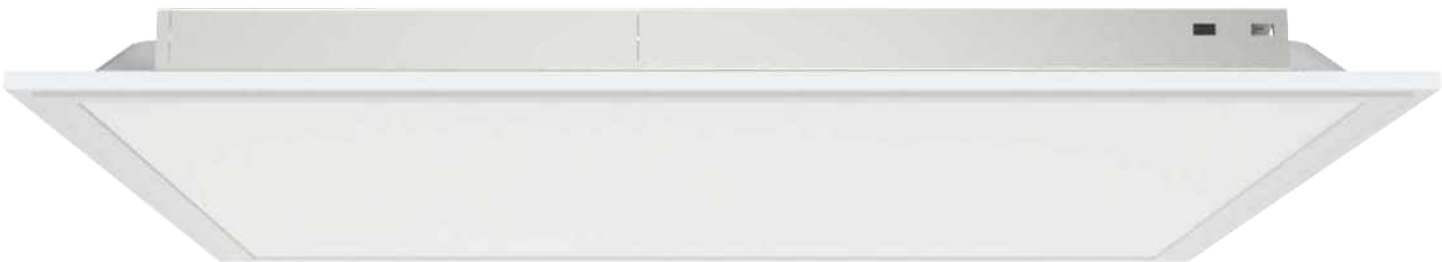

PRODUCT FEATURES

- ✓ ETL & DLC Premium Certified.
- ✓ Optional Power(W): 40W/50W.
- ✓ Lumen Efficacy(Lm/W): >130Lm/W.
- ✓ Input Voltage(V):100-277V AC.
- ✓ Ra: >80, PF: >0.95, THD: >15%.
- ✓ 0-10V Isolated Dimming Power Driver with and an efficiency >90%.
- ✓ Smart options for bi-level dimming, motion sensor with emergency power back-up function.
- ✓ Convenient Access to retrofit.
- ✓ An ideal choice for offices, Shops, Showrooms, Malls & Architectural Spaces.
- ✓ 5 year's warranty.

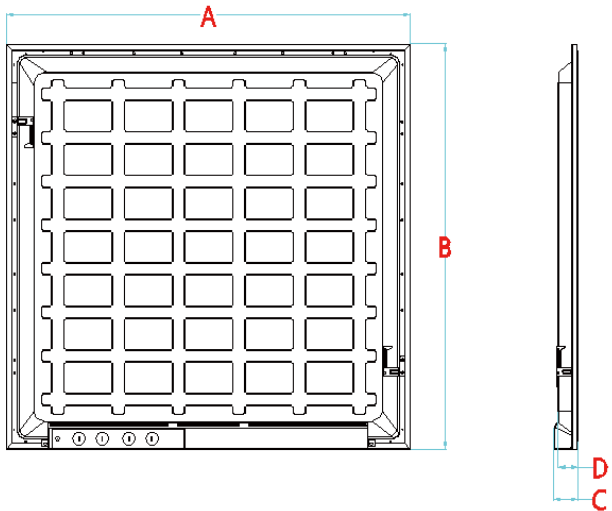


PRODUCT DIMENSION

Model	size	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)	D (inch)(mm)
CS-BPL22F40W	2*2FT	23.74" (603mm)	23.74" (603mm)	1.5" (38mm)	1.18" (30mm)
CS-BPL14F40W	1*4 FT	47.76" (1213mm)	11.93" (303mm)	1.5" (38mm)	1.18" (30mm)
cs-BPL24F50W	2*4 FT	23.74" (603mm)	47.76" (1213mm)	1.5" (38mm)	1.18" (30mm)


SPECIFICATION

Model	Size	Power	Input Voltage	Dimmable	PF	Lumen Efficacy	Ra	CCT
CS-BPL22F40W	2X2	30-35-40W	AC100-277V	0-10V	>0.9	130Lm/W	80	3500K/4000K/5000K
CS-BPL24F40W	1X4	30-35-40W	AC100-277V	0-10V	>0.9	130Lm/W	80	3500K/4000K/5000K
CS-BPL4F50W		30-35-40W	AC100-277V	0-10V	>0.9	130Lm/W	80	3500K/4000K/5000K

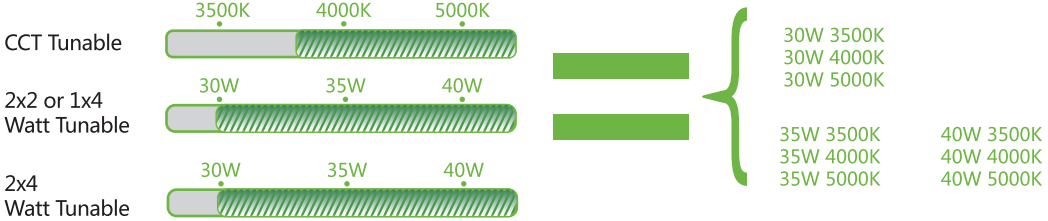


TEST REPORT


2X2 LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

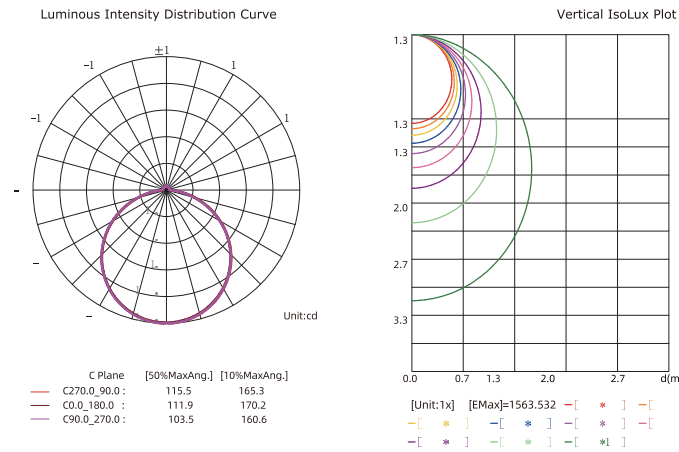


2X4 LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

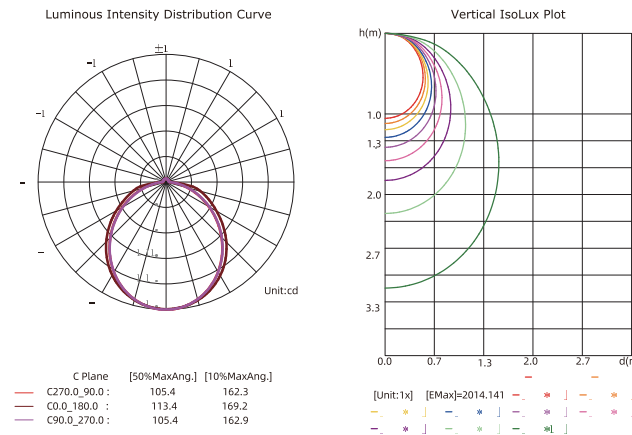

1X4 LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

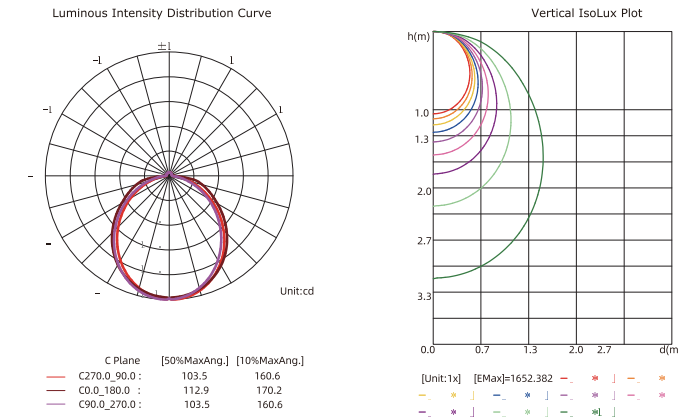


LED Panel Light

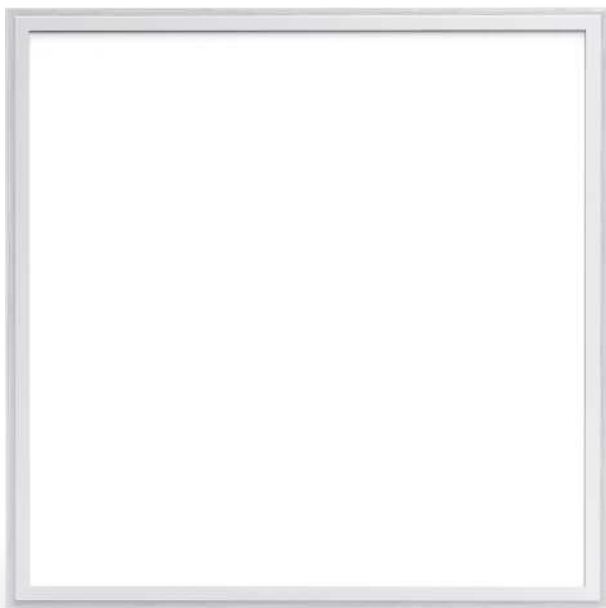

PRODUCT FEATURES

- ✓ cETL & DLC Listed.
- ✓ Optional Power(W): 30W/38W/40W/50W/72W.
- ✓ Optional Lumen Efficacy(Lm/W): 110Lm/W/ & 140Lm/W.
- ✓ Input Voltage(V):100-277V AC.
- ✓ Ra: >80, PF: >0.95, THD: >15%.
- ✓ 0-10V Isolated Dimming Lifud Power Driver with and an efficiency >92%.
- ✓ AL 6063 Aluminium Housing frame & PMMA LGP with sophisticated craftsmanship.
- ✓ Convenient Access to retrofit.
- ✓ An ideal choice for offices, Shops, Showrooms, Malls & Architectural Spaces.
- ✓ 5 year’s warranty.

PRODUCT DIMENSION

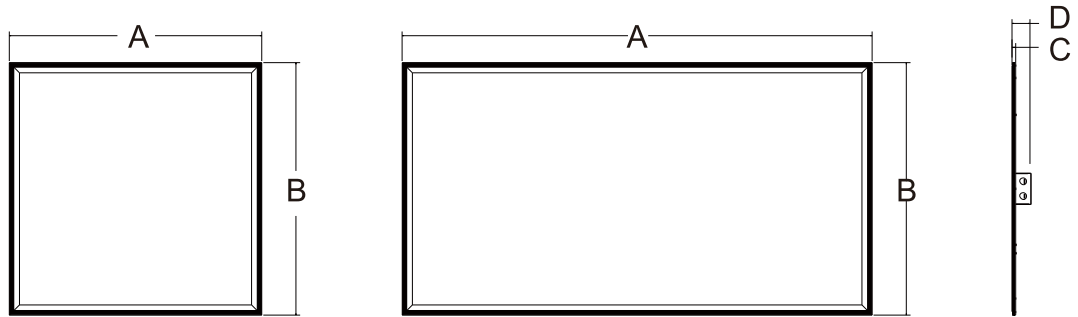



size	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)	D (inch)(mm)
2*2FT	23.74" (603mm)	23.74" (603mm)	0.35" (9mm)	1.69" (43mm)
1x4FT	47.76" (1213mm)	11.81" (300mm)	0.35" (9mm)	1.69" (43mm)
2x4 FT	23.74" (603mm)	23.74" (603mm)	0.35" (9mm)	1.69" (43mm)

SPECIFICATION

	Mode	Size	Power	Input Voltage	Dimmable	PF	Input Current	Lumen Efficacy	Ra	CCT
CS-PL22F30W		2X2	30W	AC100-277V	0-10V	>0.95	0.3A	140lm/W	80	3000K-5000K
CS-PL22F40W		2X2	40W	AC100-277V	0-10V	>0.95	0.4A	110lm/W	80	3000K-5000K
CS-PL22F40W		2X2	40W	AC100-277V	0-10V	>0.95	0.4A	140lm/W	80	3000K-5000K
CS-PL14F40W		1X4	40W	AC100-277V	0-10V	>0.95	0.4A	140lm/W	80	3000K-5000K
CS-PL24F38W		2X4	38W	AC100-277V	0-10V	>0.95	0.4A	140lm/W	80	3000K-5000K
CS-PL24F50W		2X4	50W	AC100-277V	0-10V	>0.95	0.5A	110lm/W	80	3000K-5000K
CS-PL24F50W		2X4	50W	AC100-277V	0-10V	>0.95	0.5A	140lm/W	80	3000K-5000K
CS-PL24F72W		2X4	72W	AC100-277V	0-10V	>0.95	0.72A	110lm/W	80	3000K-5000K
CS-PL24F72W		2X4	72W	AC100-277V	0-10V	>0.95	0.72A	140lm/W	80	3000K-5000K

TEST REPORT

2X2 LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

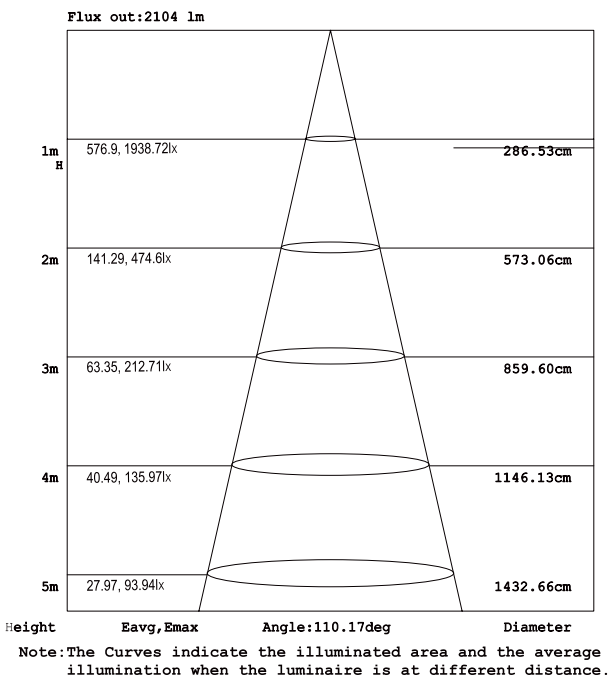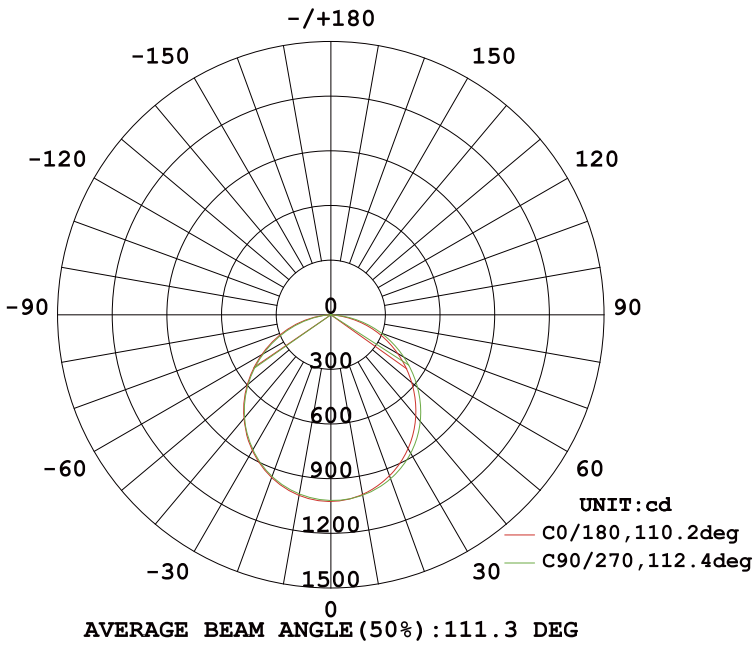


LED UFO High Bay Light



■ PRODUCT FEATURES

- ✔ Innovative & unique structure and design.
- ✔ Die-casting radiator with excellent heat dissipation, overall powder-coated and through 2000hrs' salt spray testing.
- ✔ With high transmittance of PC lens, PC cover and glass to take the different light distribution optional.
- ✔ Adopting 4mm toughened glass, no need external protective cover, high strength and high transmittance over 93%.
- ✔ Using the appropriate water-proof connector and silicone ring to seal, protecting level reaching IP65, suitable for different kinds of outdoor harsh working environment.

PRODUCT DIMENSION

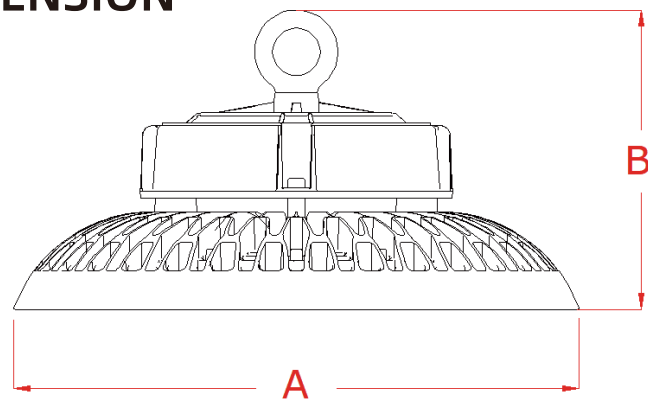



Part NO.	CS-UFOD100W	CS-UFOD160W	CS-UFOD200W	CS-UFOD240W
A (inch)(mm)	(11.42'')φ290	(13.39'')φ340	(14.96'')φ380	(14.96'')φ380
B (inch)(mm)	(6.85'')174	(7.13'')181	(7.20'')183	(7.20'')183

SPECIFICATION

	Part NO.	Power	Input Voltage	IP Rating	Input Current	PF	Lumen Efficacy	CCT
CS-UFOD100W		100W	AC100-277V	IP65	1.0A	>0.9	150lm/W	4000K-6500K
CS-UFOD160W		160W	AC100-277V	IP65	1.6A	>0.9	150lm/W	4000K-6500K
CS-UFOD200W		200W	AC100-277V	IP65	2.0A	>0.9	150lm/W	4000K-6500K
CS-UFOD240W		240W	AC100-277V	IP65	2.4A	>0.9	150lm/W	4000K-6500K

TEST REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

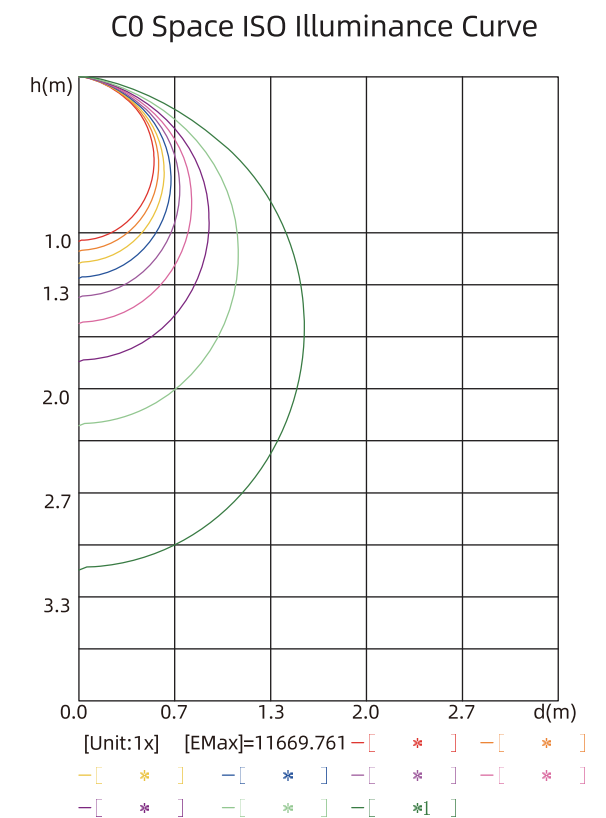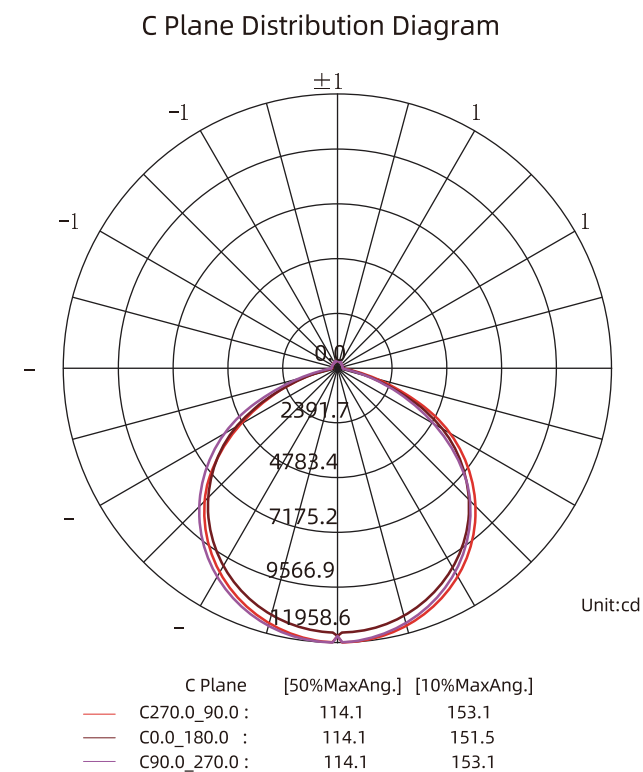


LED UFO Hight Bay Light



PRODUCT FEATURES

- ✓ Innovative & unique strcture and design.
- ✓ Dia-casting radiator with excellent heat dissipation,overall powder-coated and through 2000hrs' salt spray testing.
- ✓ With high transmittance of PC lens , PC cover and glass to take the different light distribution optional.
- ✓ Adopting 4mm toughened glass , no need external protective cover , high strength and high transmittance over 93%.
- ✓ Using the appropriative water-proof connector and silicone ring to seal,protecting level reaching IP65 , suitable for different kinds of outdoor harsh working environment.

PRODUCT DIMENSION

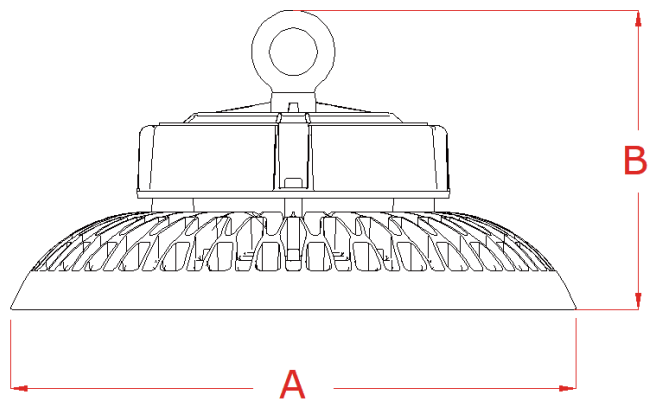



Part NO.	CS-UFOB100W	CS-UFOB160W	CS-UFOB200W	CS-UFOB240W
A (inch)(mm)	(9.84")φ250	(11.77")φ299	(13.58")φ345	(13.58")φ345
B (inch)(mm)	(7.01")178	(7.13")181	(7.20")183	(7.72")196

SPECIFICATION

Part NO.	Power	Input Voltage	IP Rating	Input Current	PF	Lumen Efficacy	CCT
CS-UFOB100W	100W	AC100-277V	IP65	1.0A	>0.9	150Lm/W	4000K-6500K
CS-UFOB160	160W	AC100-277V	IP65	1.6A	>0.9	150Lm/W	4000K-6500K
CS-UFOB200W	200W	AC100-277V	IP65	2.0A	>0.9	150Lm/W	4000K-6500K
CS-UFOB240W	240W	AC100-277V	IP65	2.4A	>0.9	150Lm/W	4000K-6500K

TEST REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

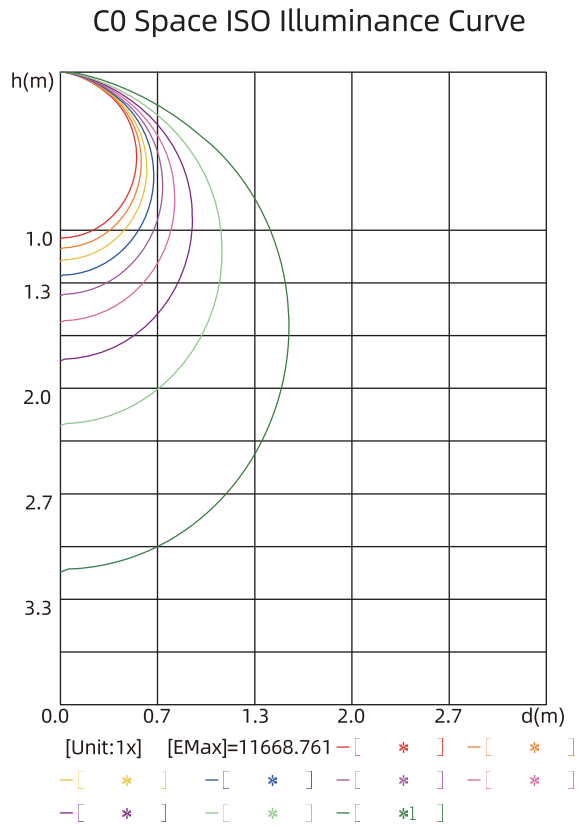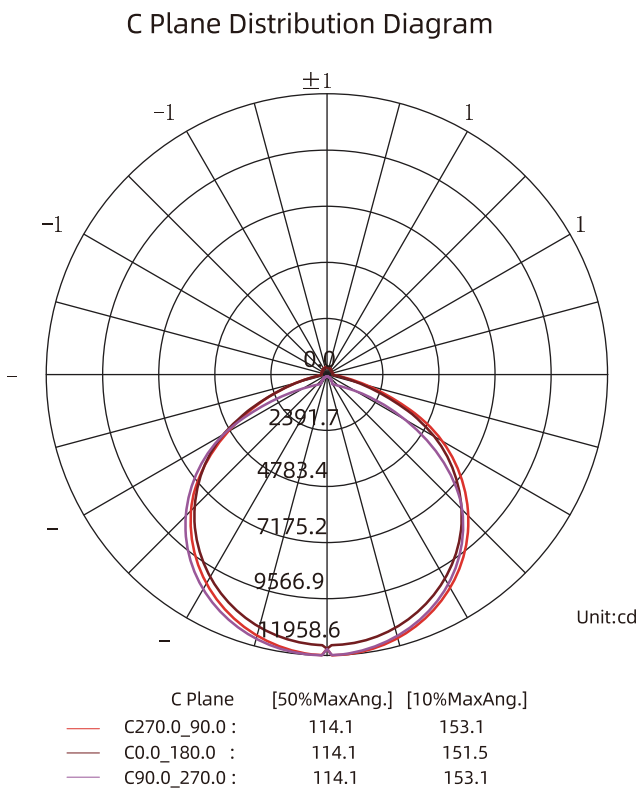


LED Linear High Bay Light



PRODUCT FEATURES

- ✓ DLC 5.1 & FCC Listed with LM79 & LM80 Report.
- ✓ Power(W): 80W-325W.
- ✓ Optional Lumen Efficacy(Lm/W): 150Lm/W.
- ✓ Input Voltage(V):100-277V AC.
- ✓ Ra: >80, PF: >0.95, THD: <20%.
- ✓ 0-10V Isolated Dimming Power Driver with and an efficiency >88%, Completely Flicker Free.
- ✓ Hanging Installation.
- ✓ Optional: Motion Sensor & Emergency Battery Power back-up.
- ✓ Suitable for dry/Damp Location.
- ✓ Convenient Access to retrofit.
- ✓ Designed for Warehouses, Gymnasiums & Industrial Spaces.
- ✓ 5 year’s warranty.

PRODUCT DIMENSION

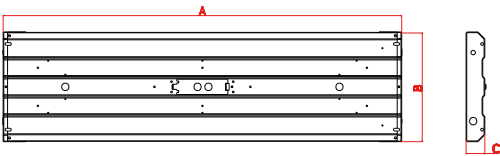


Model	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
CS-2FHB80W	23.82" (605mm)	12.60" (320mm)	2.17" (55mm)
CS-2FHB110W	23.82" (605mm)	12.60" (320mm)	2.17" (55mm)
CS-2FHB165W	23.82" (605mm)	17.32" (440mm)	2.17" (55mm)
CS-2FHB220W	23.82" (605mm)	17.32" (440mm)	2.17" (55mm)
CS-4FHB165W	45.79" (1163mm)	12.60" (320mm)	2.17" (55mm)
CS-4FHB225W	45.79" (1163mm)	12.60" (320mm)	2.17" (55mm)
CS-4FHB325W	45.79" (1163mm)	17.32" (440mm)	2.17" (55mm)
CS-2FHB110W	23.82" (605mm)	12.60" (320mm)	2.17" (55mm)
CS-2FHB165W	23.82" (605mm)	17.32" (440mm)	2.17" (55mm)
CS-2FHB220W	23.82" (605mm)	17.32" (440mm)	2.17" (55mm)
CS-4FHB225W	45.79" (1163mm)	12.60" (320mm)	2.17" (55mm)
CS-4FHB325W	45.79" (1163mm)	17.32" (440mm)	2.17" (55mm)

SPECIFICATION

Part No.	Power	Input Voltage	Size	Input Current	PF	Lumen Efficacy	Ra	CCT
CS-2FHBA80W	80W	AC120-277	2FT	0.8A	>0.95	150Lm/W	80	4000-5700K
CS-2FHBA110W	110W	AC120-277	2FT	1.1A	>0.95	150Lm/W	80	4000-5700K
CS-2FHBB165W	165W	AC100-277	2FT	1.65A	>0.95	150Lm/W	80	4000-5700K
CS-2FHBB220W	220W	AC100-277	2FT	2.2A	>0.95	150Lm/W	80	4000-5700K
CS-4FHBA165W	165W	AC100-277	2FT	1.65A	>0.95	150Lm/W	80	4000-5700K
CS-4FHBA225W	225W	AC100-277	4FT	2.25A	>0.95	150Lm/W	80	4000-5700K
CS-4FHBB325W	325W	AC100-277	4FT	3.25A	>0.95	150Lm/W	80	4000-5700K
CS-2FHBA110W	110W	AC347-480	2FT	0.33A	>0.95	150Lm/W	80	4000-5700K
CS-2FHBB165W	165W	AC347-480	2FT	0.5A	>0.95	150Lm/W	80	4000-5700K
CS-2FHBB220W	220W	AC347-480	2FT	0.67A	>0.95	150Lm/W	80	4000-5700K
CS-4FHBA225W	225W	AC347-480	4FT	0.68A	>0.95	150Lm/W	80	4000-5700K
CS-2FHBB-325W	325W	AC347-480	2FT	1.25A	>0.95	150Lm/W	80	4000-5700K

TEST REPORT

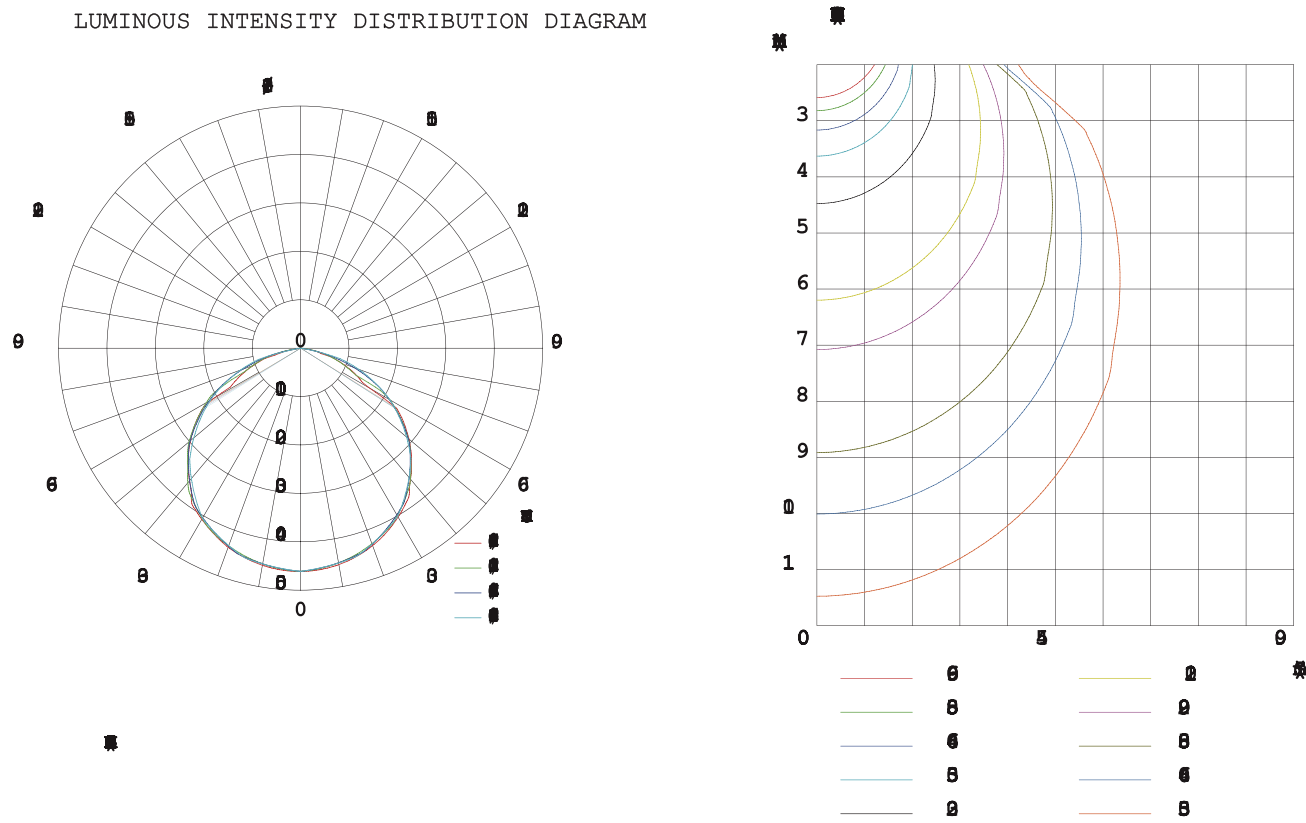


LED Shoebox/Area Light




PRODUCT FEATURES

- ✓ High Lumen Efficacy(Lm/W): >170Lm/W.
- ✓ IP65 Rated for wet location.
- ✓ Highly Efficient LED Power Driver with a wide range of Input Voltage(V): 100-277V AC OR 277-480V AC.
- ✓ Multiple beam angle option with HQ PC lens(TypeIII, TYPEIV, TYPEV).
- ✓ Multiple Sensor/Control options : PCC/Microwave sensor/Time setting.
- ✓ Various forms of Connectors & easy to assemble.
- ✓ 5 year's warranty.


PRODUCT DIMENSION

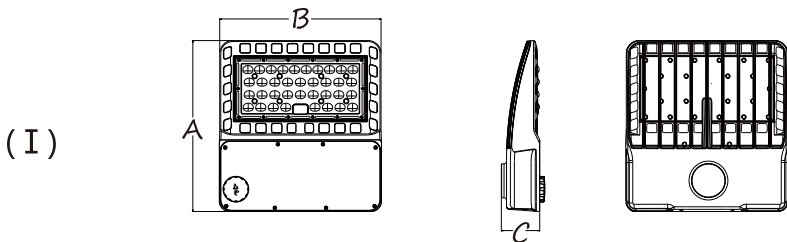

Model	Photo	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
CS-SX1100WHHV	I	13.14" (334mm)	12.44" (316mm)	2.95" (75mm)
CS-SX2100WH	I	13.14" (334mm)	12.44" (316mm)	2.95" (75mm)

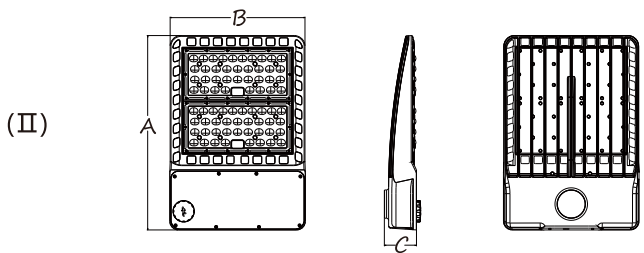

Model	Photo	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
CS-SX3150WHHV	II	17.91" (455mm)	12.44" (316mm)	2.55" (75mm)
CS-SX4150WH	II	17.91" (455mm)	12.44" (316mm)	2.55" (75mm)
CS-SX5200WH	II	17.91" (455mm)	12.44" (316mm)	2.55" (75mm)

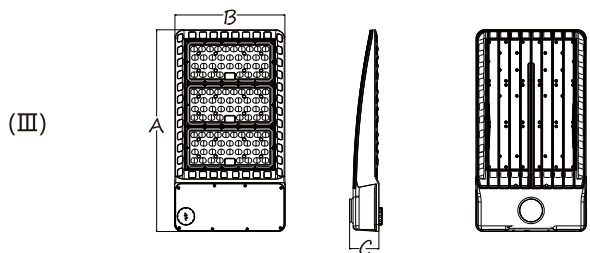


Model	Photo	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
CS-SX6240WHHV	III	22.97" (579mm)	12.44" (316mm)	3.31" (84mm)
CS-SX7240WH	III	22.97" (597mm)	12.44" (316mm)	3.31" (84mm)
CS-SX8300WHHV	III	22.97" (597mm)	12.44" (316mm)	3.31" (84mm)
CS-SX9300WH	III	22.97" (597mm)	12.44" (316mm)	3.31" (84mm)

SPECIFICATION

Part No.	Power	Input Voltage	IP Rating	Lens angle	Input Current	PF	Lumen Efficacy	Ra	CCT
CS-SX1100WHHV	100W	AC277-480V	IP 65	T3 T4 T5	0.6A	>0.9	170Lm/W	80	4000-5700K
CS-SX2100WH	100W	AC100-277V	IP 65	T3 T4 T5	1.4A	>0.9	170Lm/W	80	4000-5700K
CS-SX3150WHHV	150W	AC277-480V	IP 65	T3 T4 T5	0.8A	>0.9	170Lm/W	80	4000-5700K
CS-SX4150WH	150W	AC100-277V	IP 65	T3 T4 T5	1.9A	>0.9	170Lm/W	80	4000-5700K
CS-SX5200WH	200W	AC100-277V	IP 65	T3 T4 T5	2.8A	>0.9	170Lm/W	80	4000-5700K
CS-SX6240WHHV	240W	AC277-480V	IP 65	T3 T4 T5	1.1A	>0.9	170Lm/W	80	4000-5700K
CS-SX7240WH	240W	AC100-277V	IP 65	T3 T4 T5	3.1A	>0.9	170Lm/W	80	4000-5700K
CS-SX8300W-HHV	300W	AC277-480V	IP 65	T3 T4 T5	1.5A	>0.9	170Lm/W	80	4000-5700K
CS-SX9300H	300W	AC100-277V	IP 65	T3 T4 T5	3.8A	>0.9	170Lm/W	80	4000-5700K


LED Troffer Light

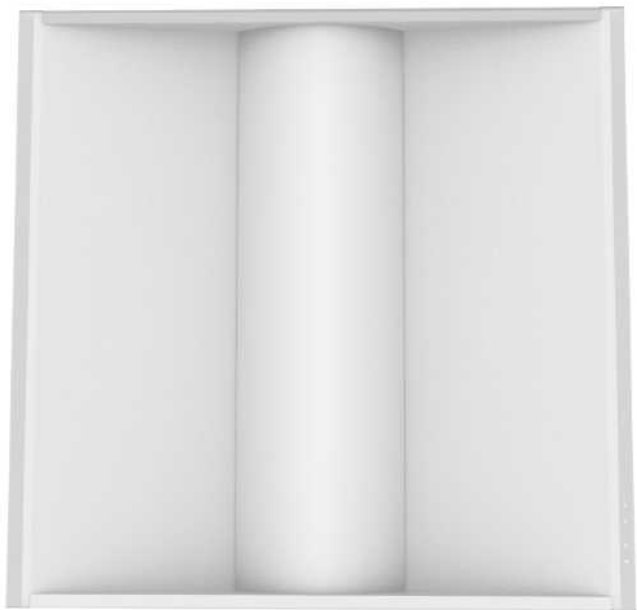

PRODUCT FEATURES

- ✓ ETL & DLC Premium Certified.
- ✓ DIP Switch:3 different Power(30W/35W/50W) and 3000K-5000K tunable CCT.
- ✓ Smooth, Glare & Flicker Free light.
- ✓ High Lumen Efficacy: >130Lm/W.
- ✓ Ra>80, PF>0.95 & THD>15%.
- ✓ White Metal housing , ensures durable quality and efficient heat dissipation.
- ✓ High-quality 0-10V dimming isolated driver , High driver Efficiency: >90%.
- ✓ Smart options for bi-level dimming, motion sensor with emergency power back-up function.
- ✓ Convenient access to retrofit.
- ✓ An ideal choice for offices, Shops, Showrooms, Malls & Architectural Spaces.
- ✓ 5 year's warranty.


PRODUCT DIMENSION

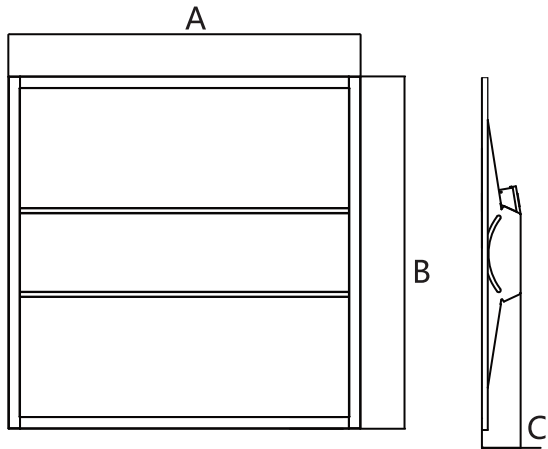

Size	Model	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
2*2FT	CS-TTR22F40W	23.74''(603mm)	23.74''(603mm)	2.64''(67mm)
2*4FT	CS-TTR24F50W	47.72''9(1212mm)	23.74''(603mm)	2.64''(67mm)


SPECIFICATION

Model	Power	Input Voltage	Dimmable	Input Current	PF	Lumen Efficacy	Ra	CCT
CS-TTR22F40W	30-35-40W	AC100-277V	0-10V	0.4A	>0.9	130Lm/W	80	3000-5000K
CSTTR24F50W	30-40-50W	AC100-277V	0-10V	0.5A	>0.9	130Lm/W	80	3000-5000K

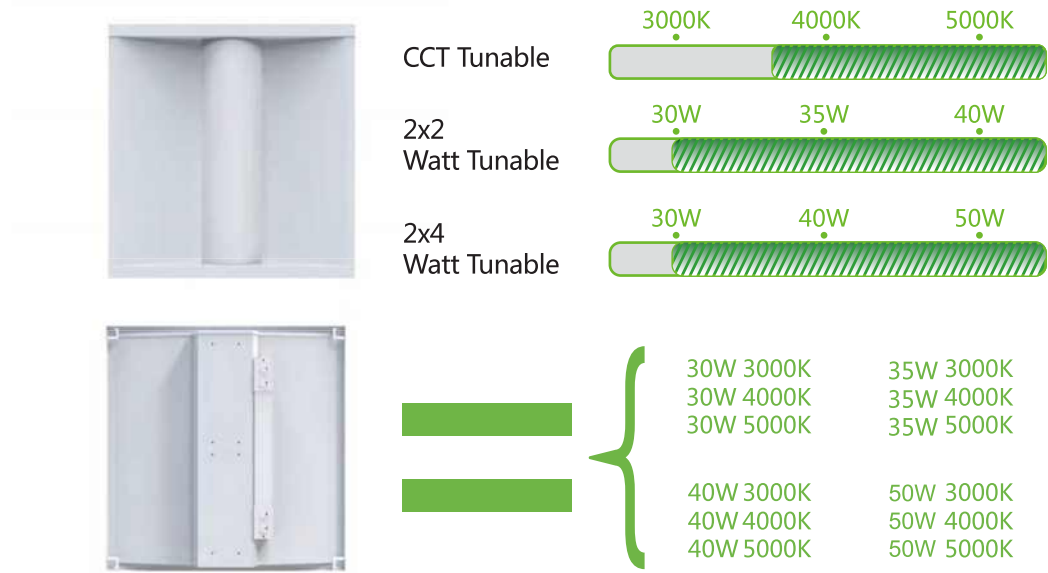


TEST REPORT

2X2 LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

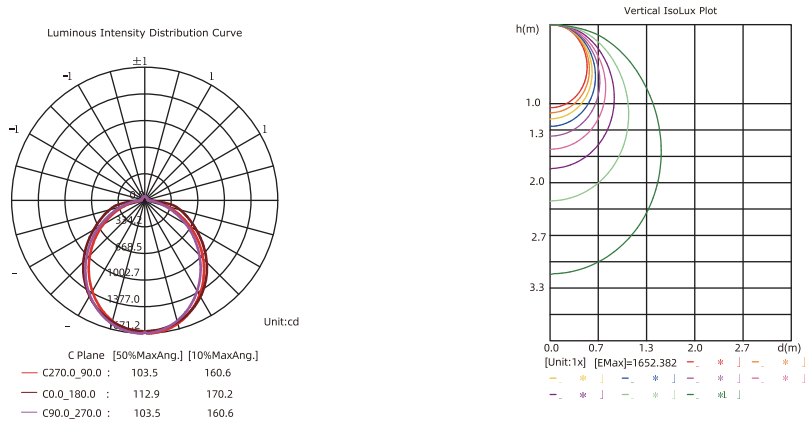

2X4 LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

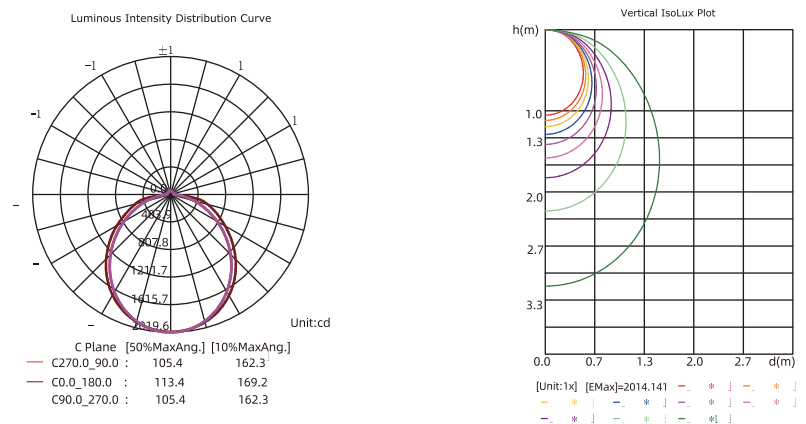

LED Strip Light



SPECIFICATION

Mode	Size	Power	Input Voltage	Input Current	PF	Lumen Efficacy	Ra	CCT
CS-ST4F30W	4FT	30W	AC100-277V	0.33A	>0.9	150Lm/W	80	4500-5700K
CS-ST4F40W	4FT	40W	AC100-277V	0.44A	>0.9	150Lm/W	80	4500-5700K
CS-ST8F60W	8FT	60W	AC100-277V	0.66A	>0.9	150Lm/W	80	4500-5700K
CS-ST8F80W	8FT	80W	AC100-277V	0.57A	>0.9	150Lm/W	80	4500-5700K


TEST REPOTR

8FT LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

PRODUCT FEATURES


- ✓ UL, FCC & DLC Listed.
- ✓ Power: 8ft: 80W
- ✓ Input Voltage(V): 100-277V AC
- ✓ Lumen Efficiency: 150Lm/W.
- ✓ 0-10V dimmable driver.
- ✓ Surface Mounting Installation.
- ✓ IP65.
- ✓ 5 years warranty.

PRODUCT DIMENSION

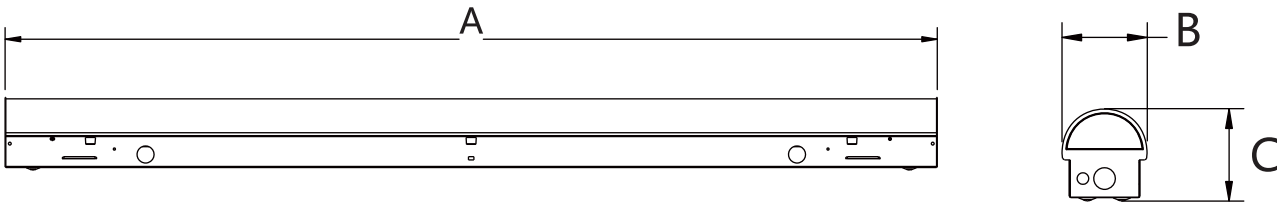

Model	Size	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
CS-ST8F80W	8FT	94.17"(2392mm)	3.39"(86mm)	3.7"(94mm)

Luminous Intensity Distribution Curve

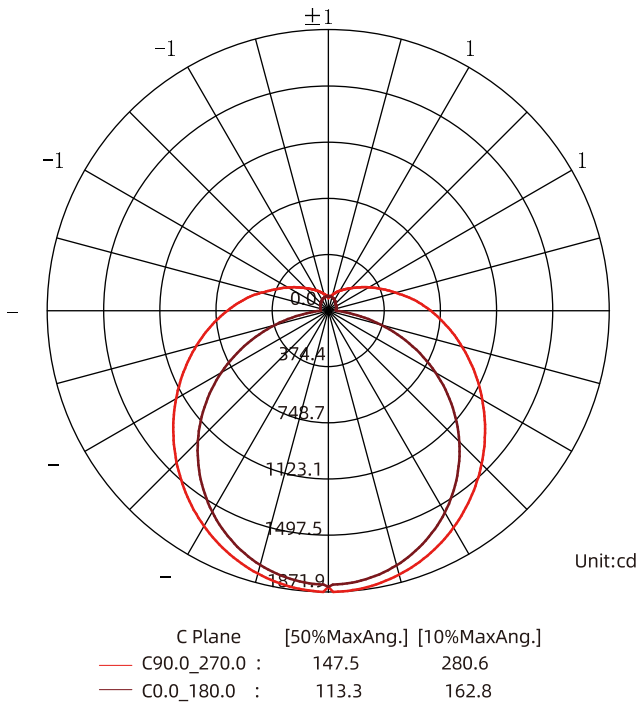

Vertical IsoLux Plot

